


Innovative Embedology

Model No: CS-LSA

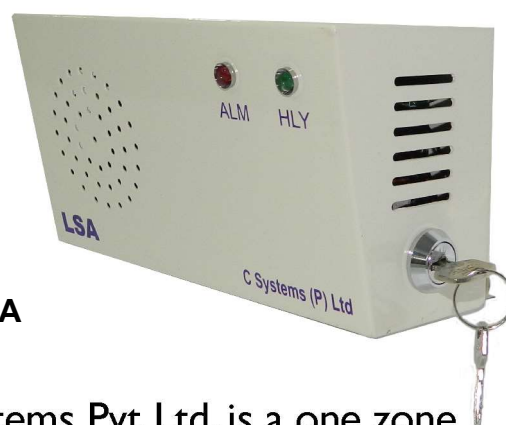

The Local Scare Alarm manufactured by C Systems Pvt Ltd, is a one zone panel that works with externally connected magnetic door contact switch (NC) and 230V AC supply. When the door, monitored by local scare alarm is opened, the hooter sounds @ 120 db.

A smart key switch provided in the panel enables the user to arm /disarm the local scare alarm system. One Volt free relay output is provided in the LSA to monitor / integrate the status of the system from remote location. On request, additional output can be provided to monitor the status of key.

## Applications

- Fire Exit door monitoring
- Panic bar

## Features

- One zone Local Scare Alarm
- Magnetic reed switch sensor
- Built in 85 db hooter
- 230V AC operated
- On/Off key for ARM/DISARM mode & reset
- Blinking Green LED for Healthy & Armed
- Red LED for Alarm
- Volt free status output for integration

## Specifications

Power	:	230V AC, 50 Hz (12V / 24V on request)
Input	:	NC magnetic reed switch
Output	:	Hooter with 85dB, Volt free output for integration
Indication	:	LED indication for alarm & mode
Colour	:	Half White
Housing	:	Mild Steel 22SWG Sheet metal
Dimensions	:	190mm(W) x 100mm(H) x 70mm(D)
Certification	:	<b>CE</b> (EN IEC 61010-1:2010 + A1:2019, EN ISO 12100:2010)