



Carbon Dioxide Transmitter& Detector

Model: CS-CO2-0XX-A Series

CE Approval

Features

Real-time detecting CO2 level.

NDIR infrared CO2 module inside with four CO2 detection range selectable.

CO2 sensor has Self-Calibration Algorithm and 15 years lifetime

Wall-mounting

Providing one analog output with voltage or current

selectable

0~10VDC/4~20mA selectable easily via jumpers

Design for HVAC, ventilation systems, offices, or other public places.

CE-Approval



CS-CO2-0XX-A Series

Specifications


Gas detected	Carbon Dioxide (CO ₂)
Sensing element	Non-Dispersive Infrared Detector (NDIR) , Gold Plated IR waveguide (Dual Beam Infra-Red)
Accuracy@25°C(77°F),2000ppm	±40ppm + 3% reading
Stability	<2% of FS over life of sensor (15 yr typical)
Calibration interval	ABC Logic Self Calibration System (Automatic Background Calibration)
Response time	<2 minutes for 90% step change
Warm up time	24 hours (first time) 10 minutes (operation)
CO ₂ measuring range	0 ~ 2,000ppm (std) / 0 ~ 50,000ppm (std) (opt: 0 ~ 5,000ppm or 0 ~ 20,000ppm) selectable in orders
Power supply	24VAC/24VDC
Consumption	1.5 W max. ; 0.8 W avg.
Analog outputs	0~10VAC or 4~20mA selectable by jumpers
Flow rates	80 ~ 120 cc/min

Operation conditions	0~50°C (32~122°F); 0~95%RH, non condensing
Storage conditions	-40~70°C (-40~158°F)
NDIR life	15 years
Net weight	180g
Dimensions	100mm×80mm×28mm
Installment standard	65mm×65mm or 2"×4" wire box
Wiring Connection	Wiring terminals or the power plug(optional)
Standard Approval	CE-Approval

Models Guide

Type	Model	Description
CO2 transmitter (1xanalog output)	CS-CO2-002-A	1Xanalog output, CO2 range: 0~2000ppm
	CS-CO2-005-A	1Xanalog output, CO2 range: 0~5000ppm
	CS-CO2-020-A	1Xanalog output, CO2 range: 0~20000ppm
	CS-CO2-050-A	1Xanalog output, CO2 range: 0~50000ppm

Wiring Diagram

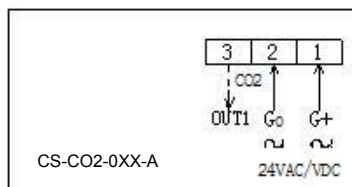

Mounting

